

Prima


APBX 8 R

Passive Reflex Sub Box
500 W





TECHNICAL SPECIFICATIONS		
Component		Passive Reflex Sub Box
Size	mm (in.)	200 (8)
Power Handling	W peak	500
	W continuous	250
Impedance	Ω	4
Sub box size	mm (in.)	470 (18.5) x 131 (5.16) x 334 (13.15)
Weight of one component	kg (lb.)	6,64 (14.64)
Magnet		High density flux ferrite
Cone		Water-repellent pressed paper
Subwoofer Voice coil \varnothing	mm (in.)	40 (1.57)

- 1 Ultra-low profile (5.16 in. / 131 mm) box with slot-ported design perfectly tuned to fully exploit the APS 8 R driver.
- 2 2S² (2 Sides/2 Sounds) design provides the ability to choose between Down-Firing mounting to increase the low-frequency extension and Up-Firing install to obtain more punch and definition.
- 3 Levelling feet with velcro inserts included for a secure grip with the carpet while maintaining easy removal.
- 4 SSP (Sub Smart Plug) features both traditional push contacts and a Plug-&-Play terminal block to easily configure the impedance as required and provides a quick release.
- 5 Rounded corners allow easy positioning in the trunk and act as reinforcement to reduce enclosure resonance.
- 6 Special designed cone-dustcap-basket geometry which guarantees a long linear excursion capability (9 mm, one-way).
- 7 Massive driver motor assembly, optimized with FEM (Finite Element Modeling) for perfect control under high excursion conditions.
- 8 Water-repellent pressed paper 8 in. cone, featuring a profile developed with FEM and optimized with the Klippel Scan Vibrometer.
- 9 Specifically developed to be combined with either the AP8.9 bit (2 CH bridged) or AP4.9 bit /AP4 D (2 CH bridged) amplifiers taking advantage of the bass boost feature and integrated parametric equalizer of the built-in DSP.
- 10 Sturdy metal grid included for a total protection of the subwoofer driver.

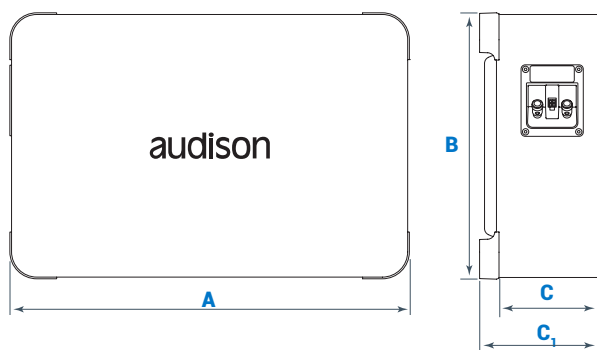

A	B	C	C ₁
470 mm	334 mm	109 mm	131 mm
18.5 in.	13.15 in.	4.29 in.	5.16 in.

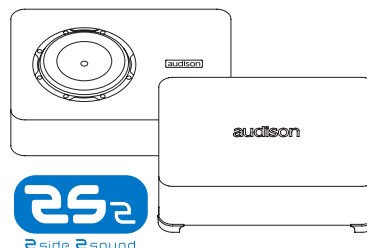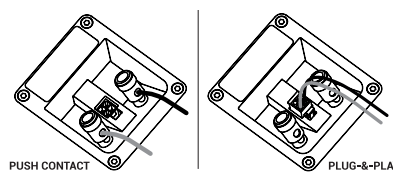

Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
elettromedia.com

